

Accessories



Gap Inspection Gauges

Features

On initial installation, the FITOK gap inspection gauge assures the installer or inspector that a fitting has been sufficiently tightened.

- ⦿ For all metal fittings, sizes from 1/16" to 1" and 2 mm to 25 mm
- ⦿ Simple and consistent operation


Ordering Information

Fitting Size		Ordering Number
in.	mm	
1/16	—	GIG-1
1/8	2, 3	GIG-2
3/16	4	GIG-3
1/4	6	GIG-4
5/16	8	GIG-5
3/8	—	GIG-6
—	10	GIG-10M
1/2	12	GIG-8
5/8	14, 15, 16	GIG-10
3/4	18	GIG-12
7/8	20, 22	GIG-14
1	25	GIG-16
1/4, 3/8, 1/2	6, 12	GIG-468
1/4, 1/2	6, 8, 10, 12	GIG-48



Bulkhead Retainers

Features

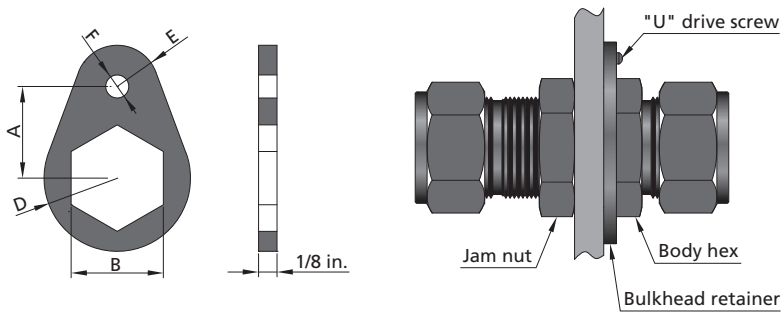

Bulkhead fitting installation
utilizing bulkhead retainer

Ordering Information

Fitting Size		Ordering Number	Dimensions, in.						"U" Drive Screw Size	Drill Number
in.	mm		A	B	D	E	F	Drill Hole Dia		
1/16	—	SS-BR-1	3/8	5/16	5/16	5/32	5/32	0.120	6-3/8	31
1/8	—	SS-BR-2	1/2	1/2	13/32	7/32				
3/16	3,4	SS-BR-3	9/16	9/16	15/32	1/4				
1/4	6	SS-BR-4	5/8	5/8	1/2	9/32				
5/16	—	SS-BR-5	11/16	11/16	9/16	5/16				
—	8	SS-BR-M8	11/16	18mm	9/16	5/16	7/32	0.161	10-1/2	20
3/8	—	SS-BR-6	3/4	3/4	5/8	11/32				
—	10	SS-BR-M10	15/16	22mm	3/4	13/32				
1/2	12	SS-BR-8	15/16	15/16	3/4	13/32				
5/8	14,15,16	SS-BR-10	1	1-1/16	13/16	13/32				
3/4	18	SS-BR-12	1-1/16	1-3/16	29/32	15/32	7/32	0.161	10-1/2	20
7/8	—	SS-BR-14	1-1/8	1-5/16	1-1/32	17/32				
1	25	SS-BR-16	1-9/32	1-5/8	1-5/32	9/16				



正規販売代理店
株式会社ナイフェスト

TEL : 050-5213-1839
watabe@nafest.co.jp
<https://www.nafest.co.jp>